

Modeling Improvements for Capacity Accreditation: SCR Modeling

Maddy Mohrman, Market Design Specialist

ICAPWG/MIWG

July 11, 2023 Reposted on September 26, 2023

Agenda

- Response to Stakeholder Requests at 6/7/23 ICAPWG
- Exploratory Testing Methodology Results
- Next Steps
- Appendix



Response to Stakeholder Requests at 6/7/23 ICAPWG



Response to Stakeholder Requests at 6/7/23 ICAPWG

- At the 6/7/23 ICAPWG, certain stakeholders requested that the NYISO provide information on historical SCR performance over time and the percentage of SCRs that submit Customer Base Load (CBL) data for event responses
- The NYISO is evaluating these requests and plans to repost the 6/7/23 ICAPWG presentation with additional information in response to these requests
 - Stakeholders will be notified when the 6/7/23 ICAPWG presentation is reposted





New Slide

Disclaimer


- Under the normal NYSRC process to incorporate any underlying modeling changes, the NYSRC would perform the Tan45 process to establish an at-criteria base case
- To test the exploratory testing methodology, the NYISO used the LCR Optimizer to re-establish an at-criteria base case, instead of the Tan 45 process
 - The Tan45 process requires significantly more time and resources to establish an at-criteria base case than the LCR Optimizer
- The two different ways to establish an at-criteria base case can result in different IRM/LCRs and CAF results
- Therefore, the CAFs within this presentation should be considered as an indicator of the potential directional and possible magnitude impacts of the exploratory testing methodology and should not be viewed as an indication of the final CAFs



- At the <u>04/27/2023 ICAPWG</u> and <u>06/07/2023 ICAPWG</u>, the NYISO presented an exploratory testing methodology for modeling SCRs in the IRM/LCR study and for capacity accreditation
 - The exploratory testing methodology aims to better reflect the expected performance and obligations of SCRs in the NYISO's market for use in the IRM/LCR study and capacity accreditation



- To test the exploratory testing methodology, the NYISO utilized the 2023 LCR model as the starting database
- Prior to altering the 2023 LCR model database, the NYISO calculated SCR CAFs using the current SCR modeling¹
 - The current SCR modeling was utilized for both the existing SCRs and the representative SCR unit

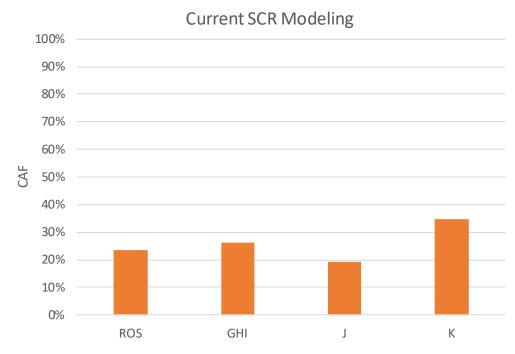

¹ More information on the current SCR modeling utilized in the 2023 LCR model is provided in the Appendix on slide 18




- Because the exploratory testing methodology required changing the modeling of the existing SCRs in the starting database, the LCR optimizer was utilized to bring the case back to at-criteria conditions
 - In this testing, the LCR optimizer was used to change only the LCRs to bring the case back to at-criteria conditions. The 2023 IRM of 120% was retained as a given parameter
 - The LOLE for the exploratory testing methodology case prior to the use of the LCR optimizer was 0.0757

	Exploratory Testing Methodology Case
NYCA IRM	120%
G-J LCR	85.4% ¹
J LCR	81.7% ¹
K LCR	10 <mark>2</mark> %

New York ISO


¹ TSL floors remained binding in the exploratory testing methodology case

- The exploratory testing methodology resulted in higher SCR CAFs compared to the current SCR modeling utilized in the 2023 LCR model
 - A key driver in the higher SCR CAFs under the exploratory testing methodology is the removal of the limitation of 5 SCR activations per month utilized in the current SCR modeling
 - By removing the 5 activations per month limit, the exploratory testing methodology allows the representative SCR unit to prevent more loss of load events

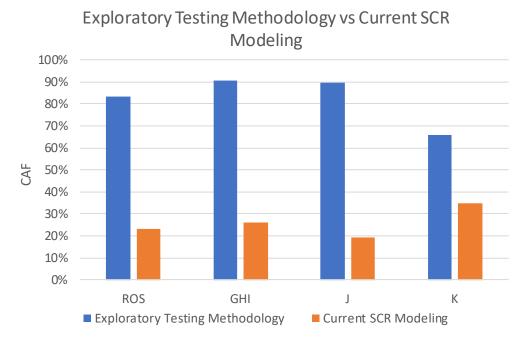



- The exploratory testing methodology resulted in SCR CAFs that are slightly lower than the 4-hr ELR CAFs calculated on the same case
 - The representative 4-hr ELR unit is subject to an energy limitation whereas the representative SCR unit is subject to a 4-hr duration limitation, consistent with the expected performance and obligations of SCRs in the NYISO's market
 - The existing SCRs, representative SCR unit, and the representative 4-hr ELR unit were subject to a 2-pm starting hour limit for this testing
 - The starting hour limit is similar to the output window restriction recommended as part of the <u>NYSRC 2021 ELR</u> functionality whitepaper

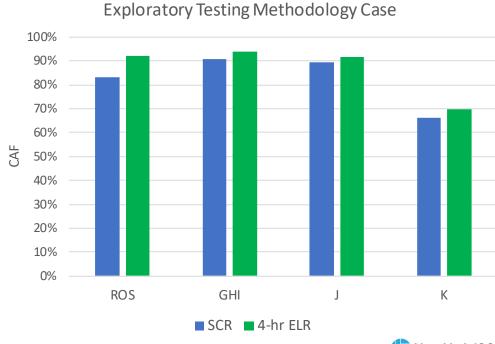

Next Steps



Next Steps

- The NYISO is coordinating with the New York State Reliability Council (NYSRC)'s Emergency Operating Procedure (EOP) whitepaper effort and will evaluate the exploratory testing methodology within broader possible EOP modeling changes
 - The NYISO anticipates returning to stakeholders at the end of August with results of this evaluation



Questions?



Appendix



Background



Background: Modeling Improvements for Capacity Accreditation

- As part of the 2022 Improving Capacity Accreditation project, the NYISO identified that the functionality utilized in the current resource adequacy analysis -- used to establish New York State installed reserve margins and used as the basis of determining Capacity Accreditation Factors -- related to the modeling of and accounting for attributes, such as correlated fuel unavailability for non-renewable resources, long start up notification requirements, non-fuel-related correlated outages, etc., may limit the basis for identifying certain Capacity Accreditation Resource Classes (CARCs) and calculating Capacity Accreditation Factors(CAFs) for some resource types
 - Enhancing the model's functionality will enable more accurate calculations of the Resource Adequacy requirements needed to maintain reliability and the Capacity Accreditation Factors, which will reflect the marginal reliability contributions of each Capacity Accreditation Resource Class
- The Modeling Improvements for Capacity Accreditation project deliverable is the development of Functional Requirements due in Q4 2023



Background: SCR Modeling

- Special Case Resources (SCRs) are modeled in the IRM/LCR model. However, the current modeling of SCRs in the IRM/LCR model is not sufficiently aligned with the expected performance and obligations of SCRs in the NYISO's market. Therefore, SCRs cannot currently be treated as a separate CARC, for which to separately calculate CAFs, using the current modeling of SCRs
 - The following slide highlights differences in the modeling of SCRs in the IRM/LCR model compared to the expected performance and obligations of SCRs in the NYISO's market
 - Until the IRM/LCR model reflects the expected performance and obligations of SCRs in the NYISO's market, SCRs will be assigned to the 4-hour Energy Duration Limitation Capacity Accreditation Resource Class
- As part of this project, the NYISO will examine and recommend how to better reflect the expected performance and obligations of SCRs in the IRM/LCR study
 - Changes to the design of the SCR program are not within the scope of this project. Discussions on the needs of demand side resources and DERs, and gaps of the current NYISO DR/DER programs will take place as part of the Engaging the Demand Side initiative.

Background: SCR Modeling

IRM/LCR modeling

- SCRs are modeled as a step in the Emergency Operating Procedure (EOP)
 - GE MARS activates EOP steps if there is not enough capacity to supply load in the simulation
- GE MARS does not consider certain market requirements such as advanced notice for SCRs
- The SCR EOP is limited to a maximum of 5 activations per month
- SCRs are modeled without output hour limitations and therefore can be available for the whole day
- All SCRs in the NYISO are activated as part of the EOP
- SCRs are modeled at a derated capacity based on zonal performance factors and zonal Average Coincident Load (ACL) to Customer Base Load (CBL) derates

Expected performance and obligations in the NYISO market

- Similar to an EOP, the NYISO activates SCRs only when the Day-Ahead Market indicates potential serious shortages of supply for the next day. (ICAP Manual Section 4.12.5)
- The NYISO is required to provide SCRs with advanced notice at least 21-hours prior to activation
- There is no maximum number of SCR activations per month in the NYISO market
- When activated, SCRs have a minimum 4-hour performance obligation. SCRs are not expected to reduce load for the entire day
- SCRs can be activated separately by LBMP zone
- SCRs receive capacity payments based on the
 Aggregation's seasonal performance factor, which
 "recognizes over-performance by one SCR to
 compensate for underperformance by another SCR
 in the same SCR Aggregation in the same hour"
 New York ISO
 (ICAP Manual Section 4.12.2)

6/7/23 ICAPWG: Exploratory Testing Methodology



6/7/23 ICAPWG: Exploratory Testing Methodology – Existing SCRs

- At the <u>04/27/2023 ICAPWG</u>, the NYISO presented an exploratory testing methodology for modeling existing SCRs as duration limited resources with hourly response rates in the IRM model
 - This modeling is intended to reflect the aggregate performance and staggered responses of individual SCRs during activations
 - The hourly response rates reflect the historical hourly performance of SCRs within each zone during mandatory events from Summer 2012 – Summer 2022
 - · Hourly response rates are presented on the following slide
- The duration limit of the zonal SCR resources will vary by load zone based on the maximum historical call length that has occurred in the zone since 2012

	SCR Activation Duration Limit by Zone (hours)			
	A-E	F	G-J	K
Duration Limit	5	7	6	7



6/7/23 ICAPWG: Exploratory Testing Methodology – Existing SCRs

Response Rate by Hour of SCR Activation							
Zones	1	2	3	4	5	6	7
A-E ¹	79%	85%	83%	71%	70%		
F	75%	81%	84%	85%	84%	67%	64%
G-I ¹	59%	68%	70%	72%	74%	72%	
J	55%	61%	66%	68%	69%	66%	
K	50%	57%	62%	65%	65%	64%	53%

¹Reflects capacity-weighted averages of zonal response rates. Zonal response rates will be used in the exploratory testing methodology



6/7/23 ICAPWG: Exploratory Testing Methodology - Existing SCRs

Zone J Modeling Example

 If an SCR activation is triggered in GE MARS, the MWs available from the existing SCRs in Zone J will vary across the hours of the activation based on the maximum modeled capacity for the month and the hourly response rates for Zone J

				Hour of SC	R Activation		
<u>Zone J</u>		1	2	3	4	5	6
July Maximum Modeled Ca pacity (MWs) ¹	α			31	0.7		
Hourly Response Rates	β	55%	61%	66%	68%	69%	66%
MWs Available	$\gamma = \alpha * \beta$	171	190	205	211	214	205

¹The maximum modeled capacities are calculated for each month using the total ICAP of SCRs enrolled in the zone in the same month of the prior year and the zonal ACL to CBL factor, as described on slide 12 of the <u>04/27/23 ICAPWG presentation</u>. For example, the maximum modeled capacity for Zone J for July (310.7 MWs) was calculated by multiplying the Zone J SCR enrollments from July 2022 [417.5 MWs] by the Zone J ACL to CBL factor, as calculated for the 2023 IRM study [74.4%]



6/7/23 ICAPWG: Exploratory Testing Methodology - Representative SCR Unit

- The representative SCR unit which will be utilized for the CAF calculations in this exploratory testing will be modeled as a 4-hour duration limited resource with 100% availability (i.e., 100% hourly response rates across 4 consecutive hours)
 - Under marginal capacity accreditation, Capacity Accreditation Factors should reflect the marginal reliability contribution expected from adding one additional unit of a Capacity Accreditation Resource Class to the system in order to send economically efficient signals for market entry and exit
 - Individual SCR units have a 4-hour performance obligation
 - The activation of the representative SCR unit will be tied to the activation of the existing SCRs in the same zone
 - The representative SCR unit will not be subject to an ACL to CBL derate



Previous Discussions



Previous Discussions - SCR Modeling

Date	Working Group	Discussion Points and Links to Materials
January 26, 2023	ICAPWG	Modeling Improvements for Capacity Accreditation: Project Kick Off - https://www.nyiso.com/documents/20142/35880057/2023-01-26%20ICAPWG%20Modeling%20Improvements%20-%20Kick%20Off.pdf/c7ac6b6e-c90b-54b4-832d-ec6ecfc8f7ff
February 28, 2023	ICAPWG	$SCR\ \ Modeling\ Kick\ Off\ -\ https://www.nyiso.com/documents/20142/36499713/2023-02-28\%20ICAPWG\%20Modeling\%20Improvements\%20-\%20SCR\%20Modeling.pdf/c1a52495-bc30-3e7c-f5c1-61c38f30fbe4$
April 27, 2023	ICAPWG	Exploratory Testing Methodology for Existing SCRs - https://www.nyiso.com/documents/20142/37254128/2023-04%20ICAPWG%20Modeling%20Improvements%20-%20SCR%20Modeling.pdf/30382824-7468-24d2-e567-56c770d6a185
June 7, 2023	ICAPWG	Exploratory Testing Methodology for the Representative SCR unit - https://www.nyiso.com/documents/20142/38023757/2023-06-07%20ICAPWG%20Modeling%20Improvements%20-%20SCR%20Modeling.pdf/250f8f1d-9dfe-5756-640b-c1e31f3a6328



Previous Discussions – Gas Constraints

Date	Working Group	Discussion Points and Links to Materials
January 26, 2023	ICAPWG	Modeling Improvements for Capacity Accreditation: Project Kick Off - https://www.nyiso.com/documents/20142/35880057/2023-01-26%20ICAPWG%20Modeling%20Improvements%20-%20Kick%20Off.pdf/c7ac6b6e-c90b-54b4-832d-ec6ecfc8f7ff
February 28, 2023	ICAPWG	Gas Constraints Kick Off - https://www.nyiso.com/documents/20142/36499713/Gas%20Constraints%2002_28_2023%20ICAPWG_Final.pdf/e258d867-12f9-8453-c93b-49bc94b8e803
April 27, 2023	ICAPWG	Estimate of Winter Gas Constraints and Market Design Considerations: https://www.nyiso.com/documents/20142/37254128/Natural%20Gas%20Constraints%202023_04_27_Final.pdf/0821aba8-bdcd-b1ce-96f3-2d8a740e1356
June 1, 2023	ICAPWG	Market Design Considerations: https://www.nyiso.com/documents/20142/37883690/Natural%20Gas%20Constraints%2006_01_2023_ICAPWG_Final.pdf/d479ea64-a0d0-86d1-388a-f93d01ff1e10
June 27, 2023	ICAPWG	lem:lem:lem:lem:lem:lem:lem:lem:lem:lem:



Previous Discussions – Correlated Derates

Date	Working Group	Discussion Points and Links to Materials
January 26, 2023	ICAPWG	Modeling Improvements for Capacity Accreditation: Project Kick Off - https://www.nyiso.com/documents/20142/35880057/2023-01-26%20ICAPWG%20Modeling%20Improvements%20-%20Kick%20Off.pdf/c7ac6b6e-c90b-54b4-832d-ec6ecfc8f7ff
February 28, 2023	ICAPWG	Correlated Derates Kick Off - https://www.nyiso.com/documents/20142/36499713/Correlated Derates MIWG 022823 FINAL.pdf/35eaab46-740e-aed0-9e2d-2207c06a0659
May 8, 2023	ICAPWG	Ambient Adjustments and Emergency Capacity: https://www.nyiso.com/documents/20142/37431277/5%20Correlated_Derates_ICAPWG_050823.pdf/a1e9a0f4-d922-503d-06d0-682b49c46c4c



Previous Discussions – Start Up Time

Date	Working Group	Discussion Points and Links to Materials
January 26, 2023	ICAPWG	Modeling Improvements for Capacity Accreditation: Project Kick Off - https://www.nyiso.com/documents/20142/35880057/2023-01-26%20ICAPWG%20Modeling%20Improvements%20-%20Kick%20Off.pdf/c7ac6b6e-c90b-54b4-832d-ec6ecfc8f7ff
April 27, 2023	ICAPWG	$\label{lem:start-up} \textbf{Start Up Time Kick Off - } \underline{\text{https://www.nyiso.com/documents/20142/37254128/Start-up\%20notification\%20time\%20-} \underline{\%20ICAPWG\%204.27.2023\%20v0.2\%20clean.pdf/b44eb773-6f7d-e895-e202-a12f2fb6e24e} \\ \underline{\%20ICAPWG\%204.2023\%20v0.2\%20clean.pdf/b44eb773-6f7d-e895-e202-a12f2fb6e24e} \\ \underline{\%20ICAPWG\%204.2023\%20v0.2\%20clean.pdf/b44eb773-6f7d-e895-e202-a12f2fb6e24e} \\ \underline{\%20ICAPWG\%204.2023\%20v0.2\%20clean.pdf/b44eb773-e202-a12f2fb6e24e} \\ \underline{\%20ICAPWG\%204.2023\%20clean.pdf/b44eb773-e202-a12f2fb6e24e} \\ \underline{\%20ICAPWG\%204.2023\%20clean.pdf/b44eb773-a12f2fb6e24e} \\ \underline{\%20ICAPWG\%204.2023\%20clean.pdf/b44eb773-a12f2fb6e24e} \\ \underline{\%20ICAPWG\%204.2023\%20clean.pdf/b44eb773-a12f2fb6e24e} \\ \%20ICAPWG\%204.2023\%2000000000000000000000000000000000$



Our Mission & Vision



Mission

Ensure power system reliability and competitive markets for New York in a clean energy future

Q

Vision

Working together with stakeholders to build the cleanest, most reliable electric system in the nation

